

Annular Ceramic Shear Sensor

Type 8762A...

Lightweight, Voltage Mode, Triaxial Accelerometer

High sensitivity triaxial accelerometers that simultaneously measure vibration in three, mutually perpendicular axis (x, y and z). Designed primarily for modal analysis applications, the triaxial accelerometer features three tapped mounting surfaces that allow each axis to be hard mounted for calibration.

- Low impedance voltage mode
- Cube shaped, ceramic shear sensor
- Ultra low thermal transient response
- Durable hard anodized, ground isolated aluminium housing
- Conforming to CE



Description

The Type 8762A... accelerometer is a unique annular, shear sensor element that features extremely low thermal transient response, a high immunity to base strain, and transverse acceleration. An advanced hybrid charge amplifier design provides outstanding phase response, as well as a wide operating frequency range. The lightweight aluminum housing is epoxy sealed and hard anodized coated to provide ground isolation.



Each of the three sensing elements is internally connected to a microelectronic circuit that converts the charge from the ceramic piezoelectric elements into a useable high level voltage signal at a low impedance output. The Type 8762A... accelerometer series will operate directly from the internal power source found in most FFT analyzers; from several Kistler Piezotron® power supply couplers or any industry standard IEPE (Integrated Electronic Piezo-Electric) compatible power source.

Application

The lightweight Type 8762A... triaxial accelerometer series is highly desirable for measurement applications on lightweight structures where mass loading must be kept to a minimum. The accelerometers are well-suited for multi-channel measurements, modal analysis measurements on automotive bodies and aircraft structures, and general vibration measurements.

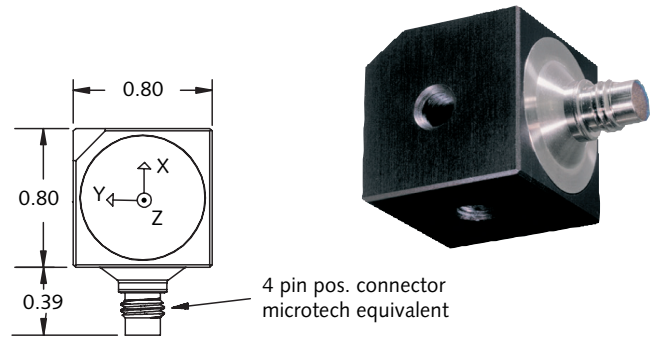

4 pin pos. connector
microtech equivalent



Accessing TEDS Data

Accelerometers with a "T" suffix are variants of the standard version incorporating the "Smart Sensor" design. Viewing an accelerometer's data sheet requires an Interface/Coupler such as Kistler's Type 5134B... or Type 5000M04 with TEDS Editor software. The Interface provides negative current excitation (reverse polarity) altering the operating mode of the PiezoSmart® sensor, allowing the program editor software to read or add information contained in the memory chip.

Mounting

The Type 8762A... accelerometer series can be attached to the test surface by using a 10-32 stud inserted in any one of the three threaded mounting holes. Reliable and accurate measurements require that the mounting surface be clean and flat. The instruction manual for Type 8762A... (8762A_002-233) provides detailed information regarding mounting surface preparation.

8762A_000-456a-10.14

Technical Data

| Specification | Unit | Type 8762A5 | Type 876A10 | Type 8762A50 |
|-----------------------------------|------|---------------|---------------|---------------|
| Acceleration range | g | ±5 | ±10 | ±50 |
| Acceleration limit | gpk | ±8 | ±16 | ±80 |
| Threshold, nom. | grms | 0.0003 | 0.00035 | 0.0012 |
| Sensitivity, ±5 % | mV/g | 1,000 | 500 | 100 |
| Resonant frequency, mounted, nom. | kHz | 30 | 30 | 30 |
| Frequency response, ±5 % | Hz | 0.5 ... 6,000 | 0.5 ... 6,000 | 0.5 ... 6,000 |
| Amplitude non-linearity | %FSO | ±1 | ±1 | ±1 |
| Time constant, nom. | s | 1 | 1 | 1 |
| Transverse sensitivity, nom. | % | <5 | <5 | <5 |

Environmental

| | | | | |
|--|------|-------------|-------------|-------------|
| Base strain sensitivity @ 250 µε | g/µε | 0.004 | 0.004 | 0.004 |
| Shock limit (0.2 ms pulse) | gpk | 5,000 | 7,000 | 7,000 |
| Temperature coefficient of sensitivity | %/°F | -0.03 | -0.01 | -0.01 |
| Operating temperature range | °F | -67...175 | -67...175 | -67...175 |
| Type 8762A...T | °F | -40 ... 175 | -40 ... 175 | -40 ... 175 |

Output

| | | | | |
|--------------------|-----|------|------|------|
| Bias, nom. | VDC | 11 | 11 | 11 |
| Impedance | Ω | ≤500 | ≤500 | ≤100 |
| Voltage full-scale | V | ±5 | ±5 | ±5 |

Source

| | | | | |
|------------------|-----|-----------|-----------|-----------|
| Voltage | VDC | 20 ... 30 | 20 ... 30 | 20 ... 30 |
| Constant current | mA | 2 ... 18 | 2 ... 18 | 2 ... 18 |

Construction

| | | | | |
|---|----------|------------------------|------------------------|------------------------|
| Sensing element | type | ceramic shear | ceramic shear | ceramic shear |
| Case/base | material | aluminum hard anodized | aluminum hard anodized | aluminum hard anodized |
| Degree of protection case/connector (EN 60529) | | IP66 | IP66 | IP66 |
| Connector | type | 4-pin pos. | 4-pin pos. | 4-pin pos. |
| Ground isolated | | yes | yes | yes |
| Mass | grams | 23 | 23 | 23 |
| Mounting (10-32 thd. x4 dp) | type | stud | stud | stud |

1 g = 9.80665 m/s², 1 in = 25.4 mm, 1 gram = 0.03527 oz, 1 lbf-in = 0.1129 N·m

Included Accessories

- Isolated stud mounting base, KIAG 10-32
- Mounting stud, 10-32 to M6,

Type
8400K07
8411

Measuring Chain

- | | | |
|---|---|----------|
| 1 | Low impedance sensor | 8762A... |
| 2 | Sensor cable, 4 pin neg. to 3x BNC pos. | 1756B... |
| 3 | Power supply/signal conditioner | 51... |
| 4 | Output cable, BNC pos. to BNC pos. | 1511 |

Ordering Key


Range

| | |
|-------|----|
| ±5 g | 5 |
| ±10 g | 10 |
| ±50 g | 50 |

TEDS Templates

| | |
|--|-----|
| Standard | - |
| Default, IEEE 1451.4 V0.9 template 0 (UTID 1) | T |
| IEEE 1451.4 V0.9 template 24 (UTID 116225) | T01 |
| LMS template 117, free format ID | T02 |
| LMS template 118, automotive format (field 14 geometry = 0) | T03 |
| LMS template 118, aerospace format (field 14 geometry = 1) | T04 |
| P1451.4 V1.0 template 25 – transfer function disabled | T05 |
| P1451.4 V1.0 template 25 – transfer function enabled | T06 |

Type 8762A



8762A_000-456a-10.14