



HEIDENHAIN



Product Information


TS 642

Workpiece Touch Probe
with Shank Switch


October 2008

TS 642

Workpiece Touch Probe with Shank Switch

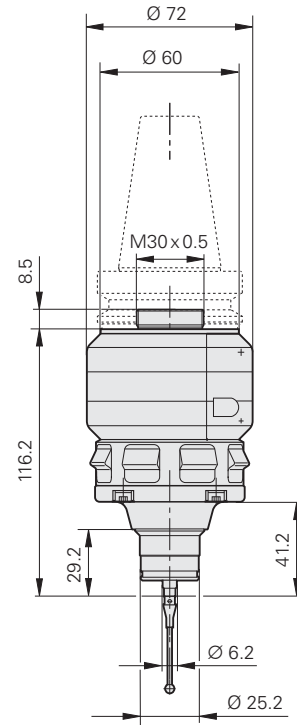

Dimensions in mm



Tolerancing ISO 8015

ISO 2768 - m H

< 6 mm: ± 0.2 mm

Workpiece Touch Probe	TS 642
Probe accuracy	≤ ± 5 µm when using a standard stylus
Probe repeatability Repeated probing from one direction	2 σ ≤ 1 µm at a probing velocity of 1 m/min <i>Typical values:</i> 2 σ ≤ 1 µm at a probing velocity of 3 m/min 2 σ ≤ 4 µm at a probing velocity of 5 m/min
Deflection of probe contact	≤ 5 mm in all directions (with stylus length L= 40 mm)
Deflection force (approx.)	Axial: 8 N Radial: 1 N
Probe velocity	≤ 5 m/min
Protection EN 60529	IP 67
Operating temperature Storage temperature	10 °C to 40 °C -20 °C to 70 °C
Weight without taper shank	Approx. 1.1 kg
Taper shank*	With taper shank (see brochure <i>Touch Probes</i>)
Signal transmission	Infrared transmission with 360° range
Transmission angle of infrared signal*	0° or +30°
Transmitter/receiver unit*	SE 540 or SE 640 (see brochure <i>Touch Probes</i>)
TS switch-on/off	Via switch in taper shank
Power supply	2 batteries (rechargeable or non-rechargeable), size C, 1 V to 4 V each
Operating time	Typically 800 hours of continuous duty with lithium batteries ¹⁾ 3.6 V/6000 mAh

* Please indicate when ordering

¹⁾ Included in delivery

Differences—TS 640 and TS 642

The TS 642 shares the essential electrical and mechanical properties of the TS 640. These include:

- High repeatability of $2\sigma \leq 1\ \mu\text{m}$
- Large infrared range of up to 7 m
- Long operating periods up to 800 h
- Use of standard size-C batteries, rechargeable or not
- Workpiece cleaning air blower/coolant flusher

The only difference between the TS 640 and TS 642 lies in the type of activation: The **TS 640** is activated from the PLC by switch-on command—the start signal R. The **TS 642** is activated by a microswitch integrated in the taper shank: when the touch probe is inserted in the machine spindle it automatically switches on the TS 642, which immediately reports readiness over the familiar ready signal B to the control.

The use of the TS 642 is especially warranted

- as a replacement for the TS 632
- for retrofitting on a TNC 4xx
- on controls for which the switch-on routine over the switch signal is very costly to realize.

Due to its integrated switch, the TS 642 is always supplied with the shank built on.



HEIDENHAIN

DR. JOHANNES HEIDENHAIN GmbH

Dr.-Johannes-Heidenhain-Straße 5

83301 Traunreut, Germany

☎ +49 (8669) 31-0

FAX +49 (8669) 5061

E-Mail: info@heidenhain.de

www.heidenhain.de

For more information

- Brochure: *Touch Probes*

